

Enel X Way Android Wi-Fi Connection Setup with JuiceConfigure



1. Download the “JuiceConfigure” mobile app:



2. Scan the QR code on the right side of your JuiceBox charger → Select **Confirm**.




3. Select **Deny** (for enabling Bluetooth) → **Configure Via Wi-Fi or 3G**.

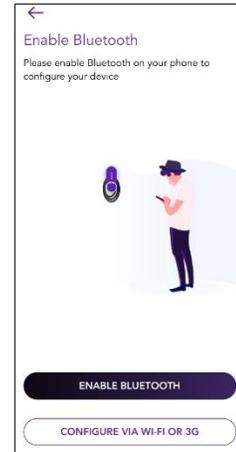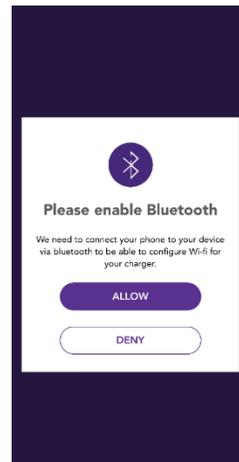


4. Reboot the JuiceBox charger by turning off the power for 30 seconds. Power it back on. The JuiceBox LED will begin flashing blue within 90 seconds.

5. On the JuiceConfigure app, select **Next**.

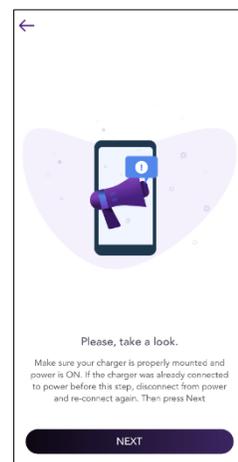


- Follow the in-app instructions by exiting the **JuiceConfigure** app and then going to the device Wi-Fi settings.


- Select the **JuiceNet-###** Wi-Fi network → Re-open **JuiceConfigure** app → Select **Start Configuration**.

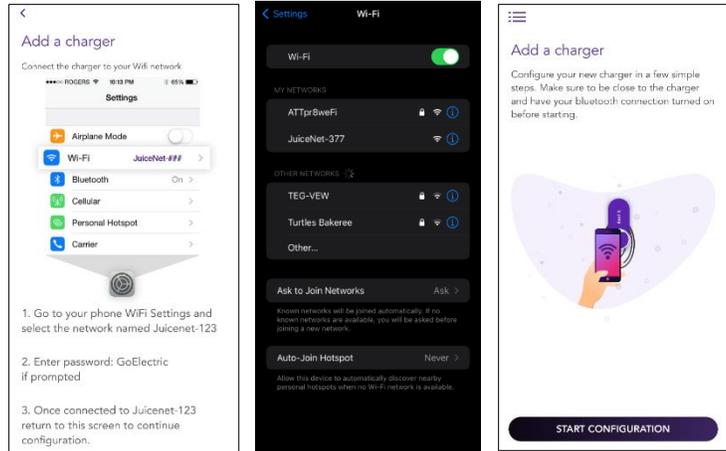


- Select your home Wi-Fi network and enter the password. Select **Connect Charger to Wi-Fi**.

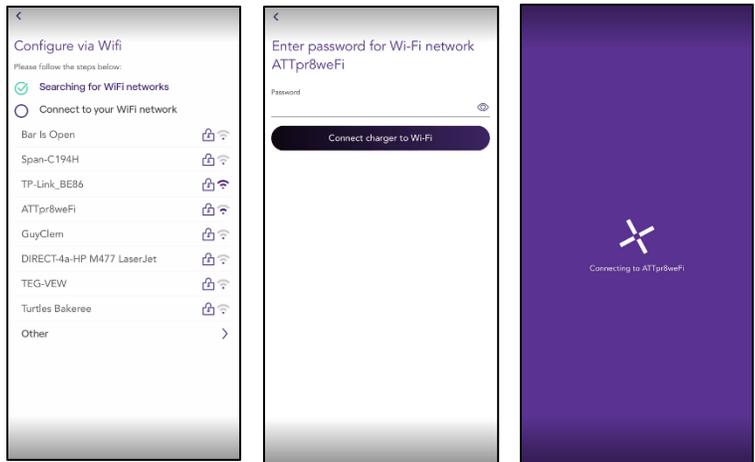

- Select **Done**. Then select **Start Configuration**.

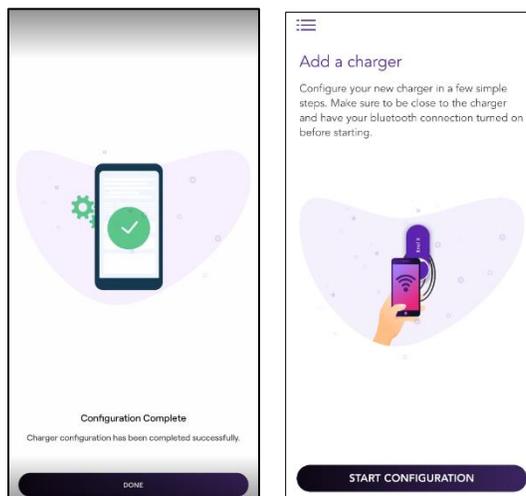

10. An error message *may* occur. Select **Reboot**. Then select **Try Again**. Exit the **JuiceConfigure** app and go to the device Wi-Fi settings. Toggle Wi-Fi to **Off**.

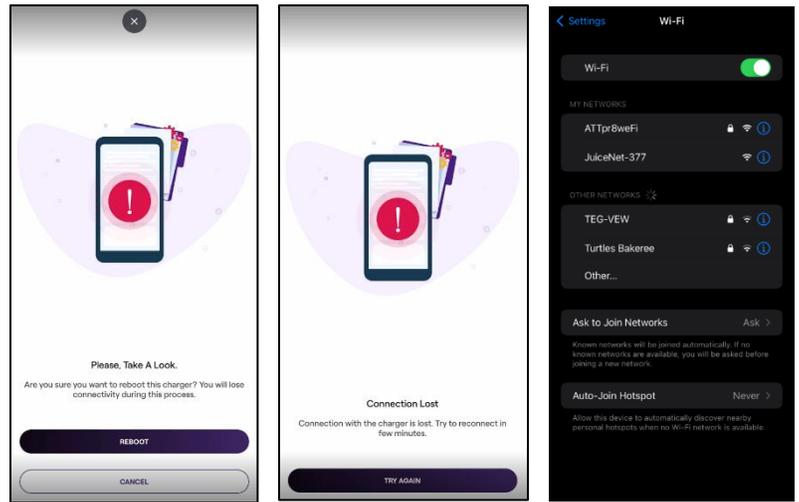

11. The JuiceBox charger LED light will transition from pink to pinkish-white once connection is established. Configuration is complete.

